

## SYSTEM DATA SHEET

# Sika Comfortfloor® Marble FX

Marble-effect, hard-wearing, self-smoothing polyurethane flooring system

### DESCRIPTION

Sika Comfortfloor® Marble FX is a marble-effect, elastic, self-smoothing polyurethane flooring system with good UV-resistance. It provides a soft, comfortable, hard-wearing, seamless, low-maintenance floor. The System is part of the Sika Comfortfloor® decorative flooring range.

### USES

Sika Comfortfloor® Marble FX may only be used by experienced professionals.

Sika Comfortfloor® Marble FX is used in the following commercial and public buildings and areas:

- Healthcare facilities and hospitals
- Schools and universities
- Shopping malls and museums
- Residential areas and homes

Please note:

- The System may only be used for interior applications.

### CHARACTERISTICS / ADVANTAGES

- Decorative designs using blends of pigments
- Comfortable to walk on
- Good resistance to UV exposure
- Soft underfoot
- Low VOC emissions
- Low odour
- Good mechanical resistance
- Good resistance to abrasion
- Easy to apply
- Low maintenance

### ENVIRONMENTAL INFORMATION

- French regulation on indoor VOC emissions class A+
- Complies with the requirements of DIBt (October 2010) in combination with the NIK values from AgBB (February 2015) for use in the indoor environment.
- Complies with the requirements of DIBt (June 2004) in combination with the NIK values from AgBB (March 2008) for use in the indoor environment.


### APPROVALS / STANDARDS

- Fire classification report EN 13501-1, GHENT, No. CR 22-0852-01
- Indoor Air Comfort Gold EN 16516, eurofins, No. IACG-439-01-05-2022

# SYSTEM INFORMATION

System Structure

Sika Comfortfloor® Marble FX

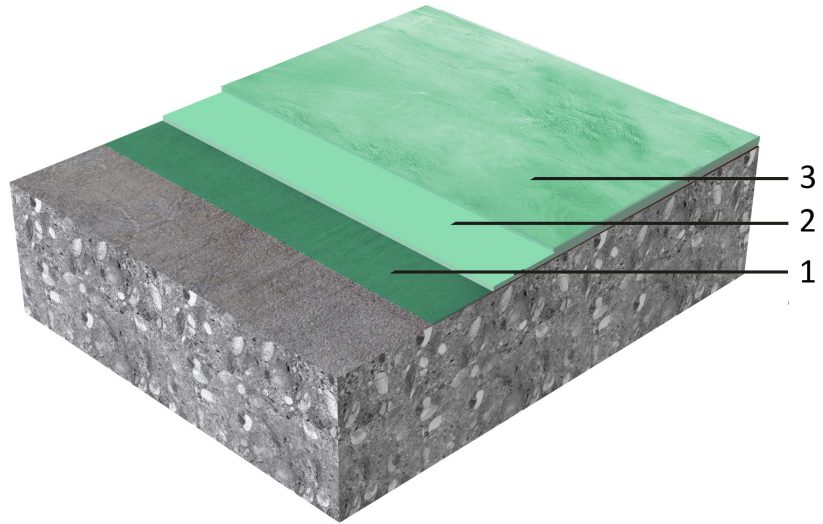

Layer	Product
1. Primer	Sikafloor®-150 Sikafloor®-151 Sikafloor®-1590 Contact Sika Technical Service for information on choosing the right primer for your project.
2. Wearing layer	Sikafloor®-3000 FX
3. Seal coat or top coat	Sikafloor®-306 W (Optional) Sikafloor®-304 W Refer to the Product Data Sheet, approvals and certification.

Composition	Polyurethane
Appearance	Smooth, matt finish
Colour	Available in various colour shades
Nominal thickness	2.0–3.0 mm

## TECHNICAL INFORMATION

Shore A Hardness	Cured 14 days at +23 °C	84	(EN ISO 868)
Castor chair resistance	No damage (25 000 cycles)		(EN 425)
Resistance to Impact	Class I (4 N/m)		(EN ISO 6272-1)
Elongation at Break	Tested at +23 °C	70 %	(DIN 53504)
Tensile Adhesion Strength	> 1.5 N/mm <sup>2</sup>		(EN 1542)
Crack Bridging Ability	Static	Class A2 (+20 °C)	(EN 1062-7)
Reaction to Fire	Class B <sub>fl</sub> -s1		(EN 13501-1)
Chemical Resistance	Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.		
Sound Insulation	2 mm accoustic layer thick-	$\Delta L_w=2$ dB	(ISO 10140-3)
	ness		

Indentation	0.02 mm	(EN 433)
Resistance to Wearing	Wearing group P	(EN 660-2)
Resistance to Moving Furniture	No damage	(EN 424)
Resistance to Stubbed Cigarettes	Class 4	(EN 1399)

## APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	Primer	Sikafloor®-150	1-2 × 0.3–0.5 kg/m <sup>2</sup>
		Sikafloor®-151	
		Sikafloor®-1590	
	Wearing layer	Sikafloor®-3000 FX	2.8 kg/m <sup>2</sup> (2 mm)
	Seal coat or top coat	Sikafloor®-306 W	0.13 kg/m <sup>2</sup> per layer diluted 10 % with water
		Sikafloor®-304 W	

Note: Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level, wastage or any other variations. Apply the Product to a test area to calculate the exact consumption for the specific substrate conditions and proposed application equipment.

Ambient Air Temperature	Maximum	+30 °C
	Minimum	+15 °C

Relative Air Humidity	Maximum	80 % r.h.
-----------------------	---------	-----------

Dew Point	Refer to the individual Product Data Sheet.	
-----------	---	--

Substrate Temperature	Maximum	+30 °C
	Minimum	+15 °C

Substrate Moisture Content	Refer to the individual Product Data Sheet.	
----------------------------	---	--

**Waiting Time / Overcoating** When using Sikafloor®-1590 refer to the individual Product Data Sheet for specific information on waiting time to overcoating.

Before applying Sikafloor®-3000 FX on the primer allow:

Temperature	Minimum	Maximum
+10 °C	17 hours	4 days
+20 °C	9 hours	2 days
+30 °C	7 hours	1 day

Before overcoating Sikafloor®-3000 FX allow:

Temperature	Minimum	Maximum
+10 °C	24 hours	72 hours
+20 °C	16 hours	48 hours
+30 °C	16 hours	36 hours

Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.

<b>Applied Product Ready for Use</b>	<b>Temperature</b>	<b>Foot traffic</b>	<b>Light traffic</b>	<b>Full cure</b>
	+10 °C	30 hours	48 hours	6 days
	+20 °C	16 hours	24 hours	4 days
	+30 °C	12 hours	18 hours	3 days

Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## FURTHER DOCUMENTS

Refer to the following method statements:

- Sika Method Statement — Evaluation and preparation of surfaces for flooring systems
- Sika Method Statement — Sikafloor® mixing and application

## ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet (MSDS) containing physical, ecological, toxicological and other safety-related data.

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of Sika® Corporate Legal in Baar.

### SIKA HONGKONG LTD.

Rm.1507-12, Blk A, New Trade Plaza,  
6 On Ping Street, Shatin, N.T., H.K.  
Phone: +852 26868108  
Fax: +852 26453671  
Mail: marketing@hk.sika.com  
Website: www.sika.com.hk



### SYSTEM DATA SHEET

Sika Comfortfloor® Marble FX  
February 2025, Version 05.01  
02081290000000048

SikaComfortfloorMarbleFX-en-HK-(02-2025)-5-1.pdf