

SYSTEM DATA SHEET

Sikafloor® MultiFlex PB-52 UV

BROADCAST, UNICOLOR, HIGH PERFORMANCE POLYURETHANE FLOOR COVERING WITH UV STABLE TOP SEALER OVER ELASTIC MEMBRANE

DESCRIPTION

Sikafloor® MultiFlex PB-52 UV is a dynamic crack-bridging, waterproofing and slip resistant polyurethane flooring system and is part of the Sikafloor® Multiflex flooring range.

Sikafloor® MultiFlex PB-52 UV is especially designed for use in car park UV exposed decks where seamless, UV and colour stable, weather and hardwearing floors are required.

Sikafloor® MultiFlex PB-52 UV consists of a highly elastic polyurethane membrane, a crack bridging polyurethane base coat, over which a flexible UV resistant top coat is applied, in order to provide a well-defined surface profile certified according to EN 1504 and DIN V 18026 - OS11a.

USES

Sikafloor® MultiFlex PB-52 UV may only be used by experienced professionals.

- For UV exposed car park decks
- Turning areas in car parks

CHARACTERISTICS / ADVANTAGES

- Elastic, watertight
- UV resistant
- Colour stable
- Dynamic crack bridging properties
- High mechanical resistance
- Good chemical resistance
- Scratch resistant surface
- Low dirt pick up
- Easy to clean and maintain
- Seamless, easy application
- Anti-slip surface

APPROVALS / STANDARDS

- Reaction to fire classification according to DIN EN 13501-1, Test institute Hoch Institut Germany, Report No.101213
- Coating for concrete protection according to EN 1504-2:2004 and provided with the CE-mark.
- Dynamic Crack-bridging Class B3.2 (-20 °C) - OS 11a, certified as part of the Surface Protection System OS 11a, according to DIN V 18026 (Rili-DAfStb) test report No. 8 IV 09/585.

SYSTEM DATA SHEET

Sikafloor® MultiFlex PB-52 UV


February 2020, Version 02.01

02081290000000021

SYSTEM INFORMATION

System Structure

Sikafloor® MultiFlex PB-52 UV

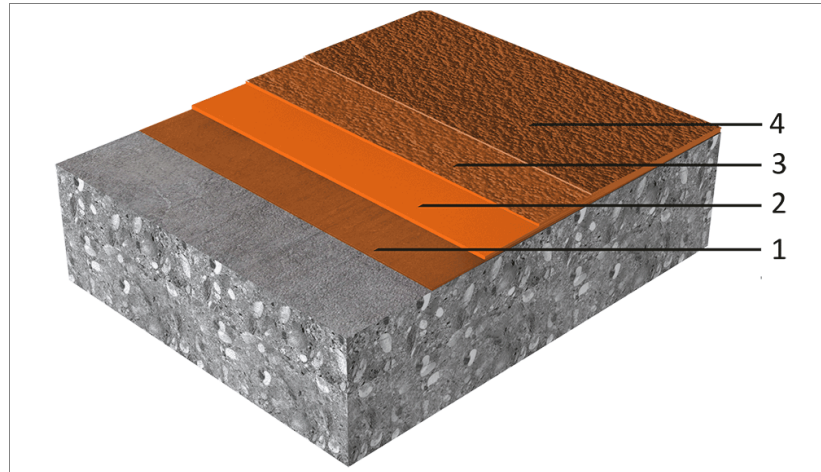

Layer	Product
1. Primer	Sikafloor®-156/-160/-161 + Aggregate broadcast 0.4–0.8 mm
2. Membrane	Sikafloor®-350N
3. Wear coat	Sikafloor®-375 (filled 1:0.4 with quartz sand 0.1–0.3 mm) + Aggregate broadcast 0.7–1.2 mm
4. Top coat	Sikafloor®-359 N

Composition	Polyurethane
Appearance	Slip resistant, matt finish
Colour	Please contact Sika for colour shade selection
Nominal Thickness	~ 4-6 mm

TECHNICAL INFORMATION

Shore D Hardness	~ 60 (14 days/+23 °C)	(DIN 53505)
Abrasion Resistance	< 3000 mg (CS 10/1000/1000)	(DIN 53109)
Resistance to Impact	Class I	(ISO 6272)
Tensile Adhesion Strength	> 1.5 N/mm ²	(EN 1542)
Crack Bridging Ability	Class B3.2 (-20°C)	(EN 1062-7)
Reaction to Fire	Cfl-s1	(EN 13501-1)
Chemical Resistance	Sikafloor® MultiFlex PB-52 UV always has to be sealed with Sikafloor®-359N. Refer to the chemical resistance of Sikafloor®-359N.	
Permeability to Water Vapour	Class III	(EN ISO 7783-1)
Capillary Absorption	w<0.1 kg/(m ² x h ^{0.5})	(EN 1062-3)
Permeability to Carbon Dioxide	S _d ≥ 50 m	(EN 1062-6)
USGBC LEED Rating	Conforms to the requirements of LEED EQ Credit 4.2: Low-Emitting Materials: Paints & Coatings SCAQMD Method 304-91 VOC Content < 100 g/l	

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	1. Primer	Sikafloor®-156/-160/-161 + Aggregate broadcast 0.4–0.8 mm	~0.4 kg/m ² /layer ~1.0 kg/m ²
	2. Membrane	Sikafloor®-350N	~2.2 kg/m ²
	3. Wear coat	Sikafloor®-375 (filled 1:0.4 with quartz sand 0.1–0.3 mm) + Aggregate broadcast 0.7–1.2 mm	~2.5 kg/m ² (mixture) ~6.0–8.0 kg/m ²
	4. Top coat	Sikafloor®-359 N	~0.7–0.9 kg/m ² /layer

Consumptions are theoretical and do not include any wastage or additional materials needed due to porosity, substrate profile etc.

Product Temperature +10 °C min. / +30 °C max.

Ambient Air Temperature +10 °C min. / +30 °C max.

Relative Air Humidity 80 % max.

Dew Point Beware of condensation!
The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or other disturbance of the surface on the floor finish

Substrate Temperature +10 °C min. / +30 °C max.

Substrate Moisture Content Sikafloor® MultiFlex PB-52 UV can be installed on substrates with moisture content of max. 4 % (checked by Tramex). The substrate needs to be visibly dry and have an adequate pull-off strength min 1.5 N/mm². Check for rising moisture.

Applied Product Ready for Use	Temperature	Foot traffic	Light traffic	Full cure
	+10 °C	~ 24 hours	~ 3 days	~ 7 days
	+20 °C	~ 12 hours	~ 2 days	~ 5 days
	+30 °C	~ 5 hours	~ 1 day	~ 4 days

Note: Times are approximate and will be affected by changing ambient and substrate conditions

PRODUCT INFORMATION

Packaging Please refer to the individual Product Data Sheets

Shelf Life Please refer to the individual Product Data Sheets

Storage Conditions Please refer to the individual Product Data Sheets

MAINTENANCE

CLEANING

Please refer to the Sikafloor®- Cleaning Regime

LIMITATIONS

- Freshly applied Sikafloor® products must be protected from damp, condensation and water for at least 24 hours.
- Uncured material reacts in contact with water (foaming).
- During application care must be taken that no sweat drops into fresh Sikafloor® products (wear head and wrist bands).
- For exact colour matching, ensure the Sikafloor® product in each area is applied from the same control batch number.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet (MSDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request. It may be necessary to adapt the above disclaimer to specific local laws and regulations. Any changes to this disclaimer may only be implemented with permission of Sika® Corporate Legal in Baar.

SIKA HONGKONG LTD.

Rm.1507-12, Blk A, New Trade Plaza,
6 On Ping Street, Shatin, N.T., H.K.
Phone: +852 26868108
Fax: +852 26453671
Mail: marketing@hk.sika.com
Website: www.sika.com.hk



SYSTEM DATA SHEET

Sikafloor® MultiFlex PB-52 UV
February 2020, Version 02.01
02081290000000021

SikafloorMultiFlexPB-52UV-en-HK-(02-2020)-2-1.pdf